



County of San Diego
Department of Planning and Land Use
BUILDING DIVISION

ACCESSIBILITY CORRECTION LIST

Multifamily Housing

2A

Parking Facilities

PLAN CHECK NUMBER:

OWNER:

SCOPING

1. The accessibility provisions of this correction list apply to the following parking facilities serving covered multifamily dwellings and associated common-use facilities:

- ☐ Garages
- ☐ Private garages
- ☐ Carports
- ☐ Off-street parking (e.g., parking lots or spaces)

Exception: An attached private garage directly serving a single covered multifamily dwelling unit with one of the following:

- o Interior door leading directly from dwelling unit to garage and complying with provisions of accessibility correction list 15A
- o Accessible route from dwelling unit to exterior door entering garage with both dwelling unit and garage doors complying with provisions of accessibility correction list 15A
- o Accessible route from dwelling unit's primary entry door to vehicular entrance to garage with dwelling unit door complying with provisions of accessibility correction list 15A

CBC 1109A.1 and CBC 1109A.2

2. Identify on site accessibility plan accessible parking spaces numbering minimum 2% of covered multifamily dwelling units with at least one accessible space provided in each type of parking facility.

CBC 1109A.3

3. Where assigned parking provided for residents or groups of residents, identify on site accessibility plan minimum 2% of assigned spaces serving covered multifamily dwellings as accessible with at least one accessible space provided in each type of parking facility

CBC 1109A.4

4. Where assigned parking provided, designated accessible parking serving a covered multifamily dwelling unit shall be provided upon request of residents and with full range of choices – e.g., off-street parking, carport, garage – available for other residents.

CBC 1109A.6

5. Where unassigned and visitor parking provided, identify on site accessibility plan minimum 5% of parking spaces as accessible and providing access to grade-level entrances of covered multifamily dwellings and associated facilities.

CBC 1109A.5

6. Identify on site accessibility plan one of every eight accessible parking spaces – but not less than one – as van accessible.

CBC 1109A.8.6

7. Identify on site accessibility plan accessible routes between parking spaces and building entrances using ■■■■■ or equivalent symbol.

CBC 1109A.7

8. Accessible parking spaces shall be located on shortest accessible route to accessible building or covered multifamily dwelling unit entrance.

Exception: All van accessible spaces may be grouped on one level of parking facility

CBC 1109A.7(1)

9. In parking facilities not serving a particular building, accessible parking spaces shall be located on shortest accessible route to an accessible pedestrian entrance to parking facility.

CBC 1109A.7(4)

10. In buildings with multiple entrances with adjacent parking, accessible parking spaces shall be dispersed to serve each entrance.

CBC 1109A.7(2)

11. Accessible parking space locations shall not compel persons with disabilities to wheel or walk behind parked cars other than their own.

CBC 1109A.7(5)

12. Accessible routes shall not cross lanes for vehicular traffic when practical.

Exception: When crossing vehicular traffic lanes is necessary, accessible route shall be designated and marked as crosswalk

CBC 1109A.7(3)

DIMENSIONS AND CONFIGURATION

13. Provide complete dimensions and coordinated detailing for each accessible parking space.

CBC 1109A.8

14. Where individual accessible parking spaces are provided, dimension the following per CBC Figure 11A-2B:

- ☐ Minimum 9-foot-wide by 18-foot-long parking stall
- ☐ Minimum 5-foot-wide by 18-foot-long access aisle on passenger side of vehicle

CBC 1109A.8.5

15. Where dual accessible parking spaces are provided, dimension the following per CBC Figure 11A-2A or CBC Figure 11A-2C:

- ☐ Two minimum 9-foot-wide by 18-foot-long parking stalls
- ☐ Minimum 5-foot-wide by 18-foot-long access aisle between parking stalls

CBC 1109A.8.5

16. Where van-accessible parking spaces are provided, dimension minimum 8-foot-wide access aisle on passenger side of vehicle.

CBC 1109A.8.6

**THIS DOCUMENT IS FOR PLAN REVIEW ONLY.
CORRECTION LIST ITEMS MAY NOT BE REPRODUCED OR COPIED ON PLANS.
PROVIDE COMPLETE DETAILS, DIMENSIONS, AND NOTES TO SATISFY CORRECTION ITEMS.**

5201 RUFFIN ROAD, SUITE B, SAN DIEGO, CA 92123 • (858) 565-5920 • (888) 336-7553

HTTP://WWW.SDCDPLU.ORG

17. Identify on site accessibility plan minimum 98-inch vertical clearance at the following locations within each parking facility:
- ☐ Entrances
 - ☐ Exits
 - ☐ Accessible parking spaces and access aisles
 - ☐ Vehicular passageways serving accessible spaces

Exception: Lower vertical clearance acceptable for vehicular passageways serving inaccessible parking spaces if reflective warning signs provided where entering areas with less than 98-inch vertical clearance

CBC 1109A.8.1

18. Specify maximum 1:48 slope (2.1% gradient) in all directions at surfaces of accessible parking stalls and access aisles.

CBC 1109A.8.3

19. Provide bumpers or curbs at all applicable parking stalls – accessible and otherwise – to prevent vehicle encroachment into required width of adjacent pedestrian ways.

CBC 1109A.8.2(1)

20. Where curbs separate access aisles and adjacent pedestrian ways, provide curb ramps per accessibility correction list 3A with no encroachment into accessible parking stalls or access aisles.

CBC 1109A.8.2(2)

IDENTIFICATION AND SIGNAGE

21. The signage requirements of items 22 through 27 do not apply to accessible assigned parking spaces provided per item 3.

CBC 1109A.4

22. Detail surface identification complying with one of the following configurations at each accessible parking stall:

- ☐ Outlined 36-inch by 36-inch International Symbol of Accessibility per CBC Figure 11A-1A(b) in white on blue background and located for visibility by traffic enforcement personnel when vehicle properly parked
- ☐ Stall outlined or painted blue with International Symbol of Accessibility outlined in white or color contrasting pavement/background

CBC 1109A.8.8

23. Detail surface identification complying with the following at each accessible parking access aisle:

- ☐ Blue access aisle border
- ☐ Blue or white hatched lines maximum 36 inches on center within access aisle
- ☐ "NO PARKING" painted on ground within access aisle in white letters minimum 12-inches high and located for visibility by traffic enforcement personnel

CBC 1109A.8.5(4)

24. Identify on site accessibility plan location of each parking-related sign required per items 25 through 27 and coordinate with signage schedule and/or details indicating the following:

- ☐ Sign dimensions
- ☐ Character and symbol dimensions
- ☐ Character, symbol, and background colors
- ☐ Sign placement (e.g., post-mounted, wall-mounted)
- ☐ Horizontal/vertical clearance dimensions from pedestrian ways

CBC 1109A.8.8

25. Provide sign complying with the following adjacent to and visible from each accessible parking space:

- ☐ International Symbol of Accessibility symbol in white on blue background per CBC Figure 11A-1A(b)
- ☐ Minimum 70 square inches
- ☐ Minimum 80-inch vertical clearance above parking surface when in path of travel

Exception: Sign also may be centered on a wall at an interior end of parking space at minimum 36-inch height

- ☐ Reflectorized surface

CBC 1109A.8.8

26. Provide sign reading "Van Accessible" at each van-accessible parking space below accessibility sign specified per item 25.

CBC 1109A.8.8

27. Provide tow-away warning signs complying with the following:


- ☐ Posted conspicuously at each parking facility entrance or adjacent to and visible from each accessible parking space
- ☐ Minimum 17 inches by 22 inches
- ☐ Minimum 1-inch-high lettering
- ☐ Reading: "Unauthorized vehicles parked in designated accessible spaces not displaying distinguishing placards or special license plates issued for persons with disabilities will be towed away at the owner's expense. Towed vehicles may be reclaimed at _____ or by telephoning _____."
- ☐ Tow-away contact information specified on sign detail

CBC 1109A.8.8




**CBC FIGURE 11A-1A(b) –
INTERNATIONAL SYMBOL OF ACCESSIBILITY
(WHITE FIGURE ON BLUE BACKGROUND EQUAL TO
COLOR NO. 15090 IN FEDERAL STANDARD 595B)**


**THESE FIGURES ARE FOR ILLUSTRATIVE PURPOSES ONLY.
THEY ARE NOT INTENDED FOR REPRODUCTION AS PLAN DETAILS.
IF CONFLICTS EXIST BETWEEN THESE FIGURES AND THE TEXT
OF THE CALIFORNIA BUILDING CODE, THE CODE TEXT SHALL GOVERN.**

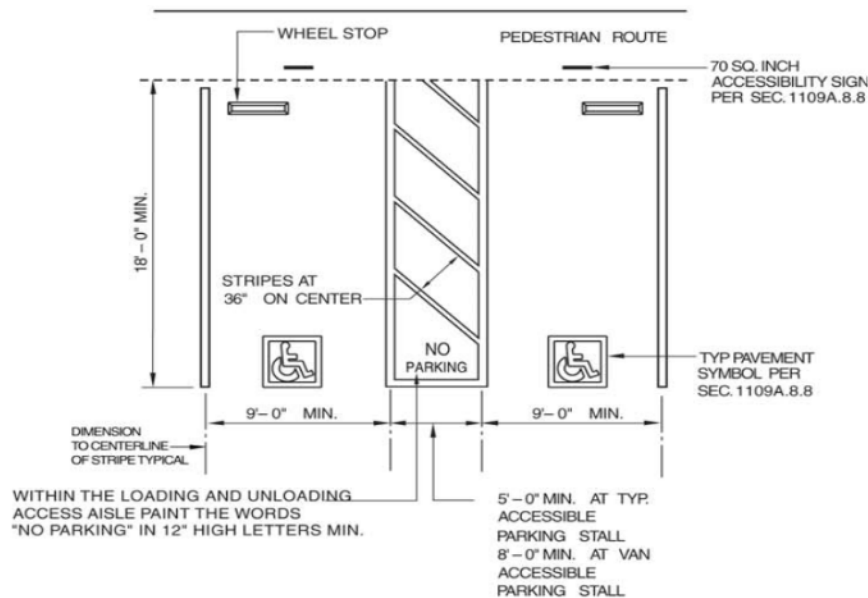

CBC FIGURE 11A-2A – DOUBLE PARKING STALLS

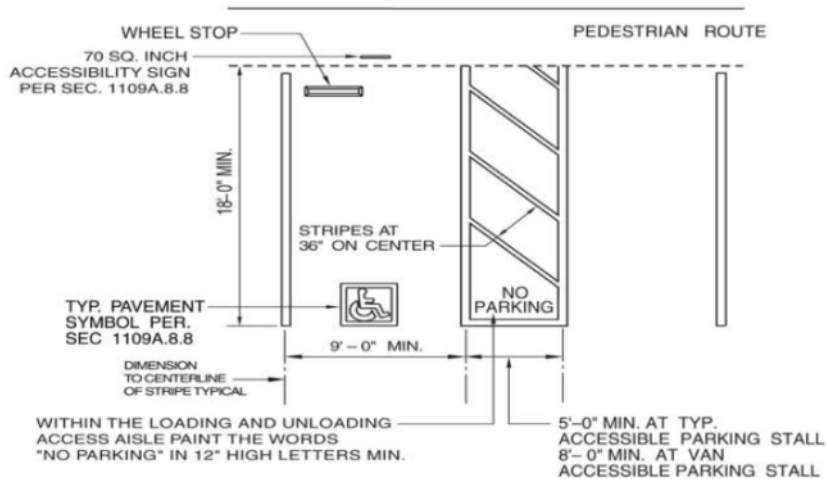

CBC FIGURE 11A-2B – SINGLE PARKING STALL

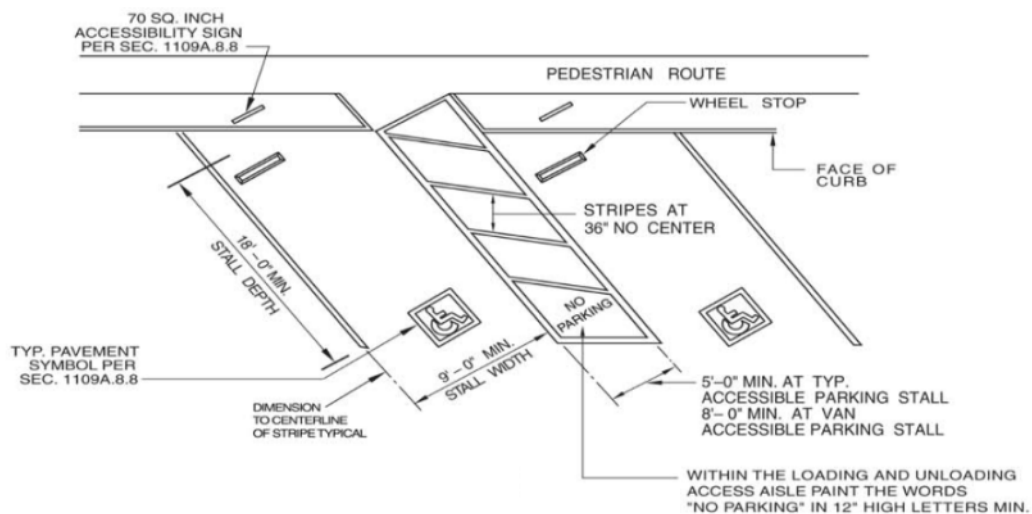

CBC FIGURE 11A-2C – DIAGONAL PARKING STALLS

**THESE FIGURES ARE FOR ILLUSTRATIVE PURPOSES ONLY.
THEY ARE NOT INTENDED FOR REPRODUCTION AS PLAN DETAILS.
IF CONFLICTS EXIST BETWEEN THESE FIGURES AND THE TEXT
OF THE CALIFORNIA BUILDING CODE, THE CODE TEXT SHALL GOVERN.**